

1/12






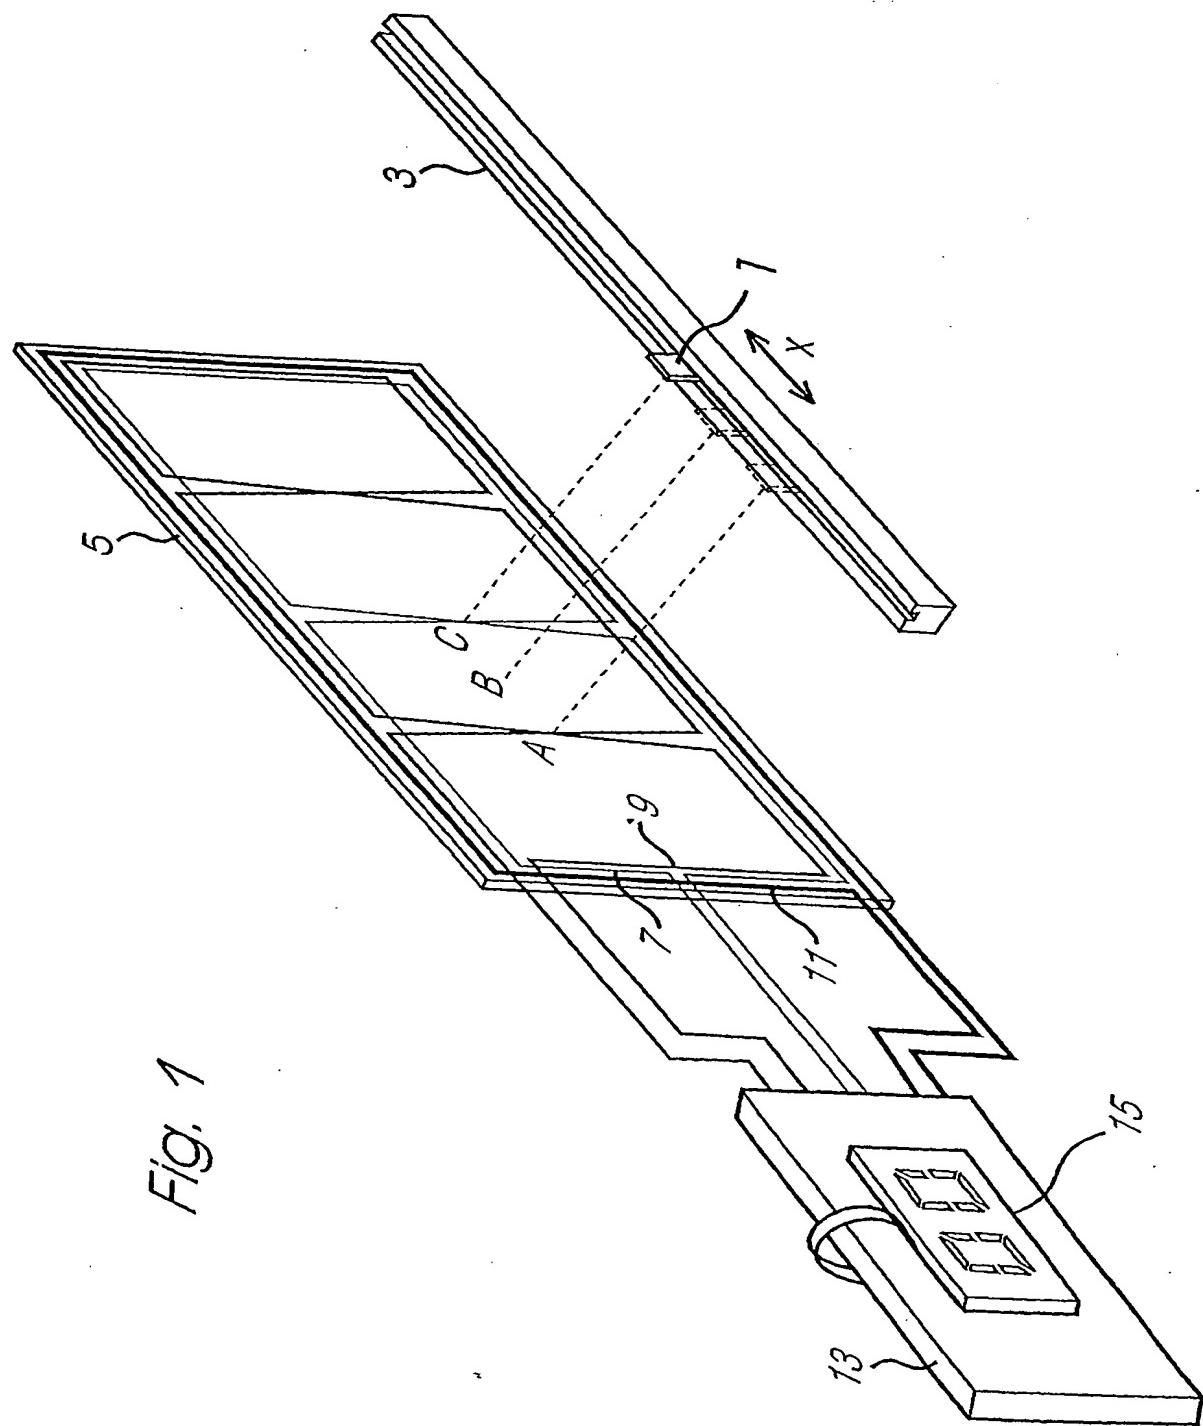


Fig. 1

2/12

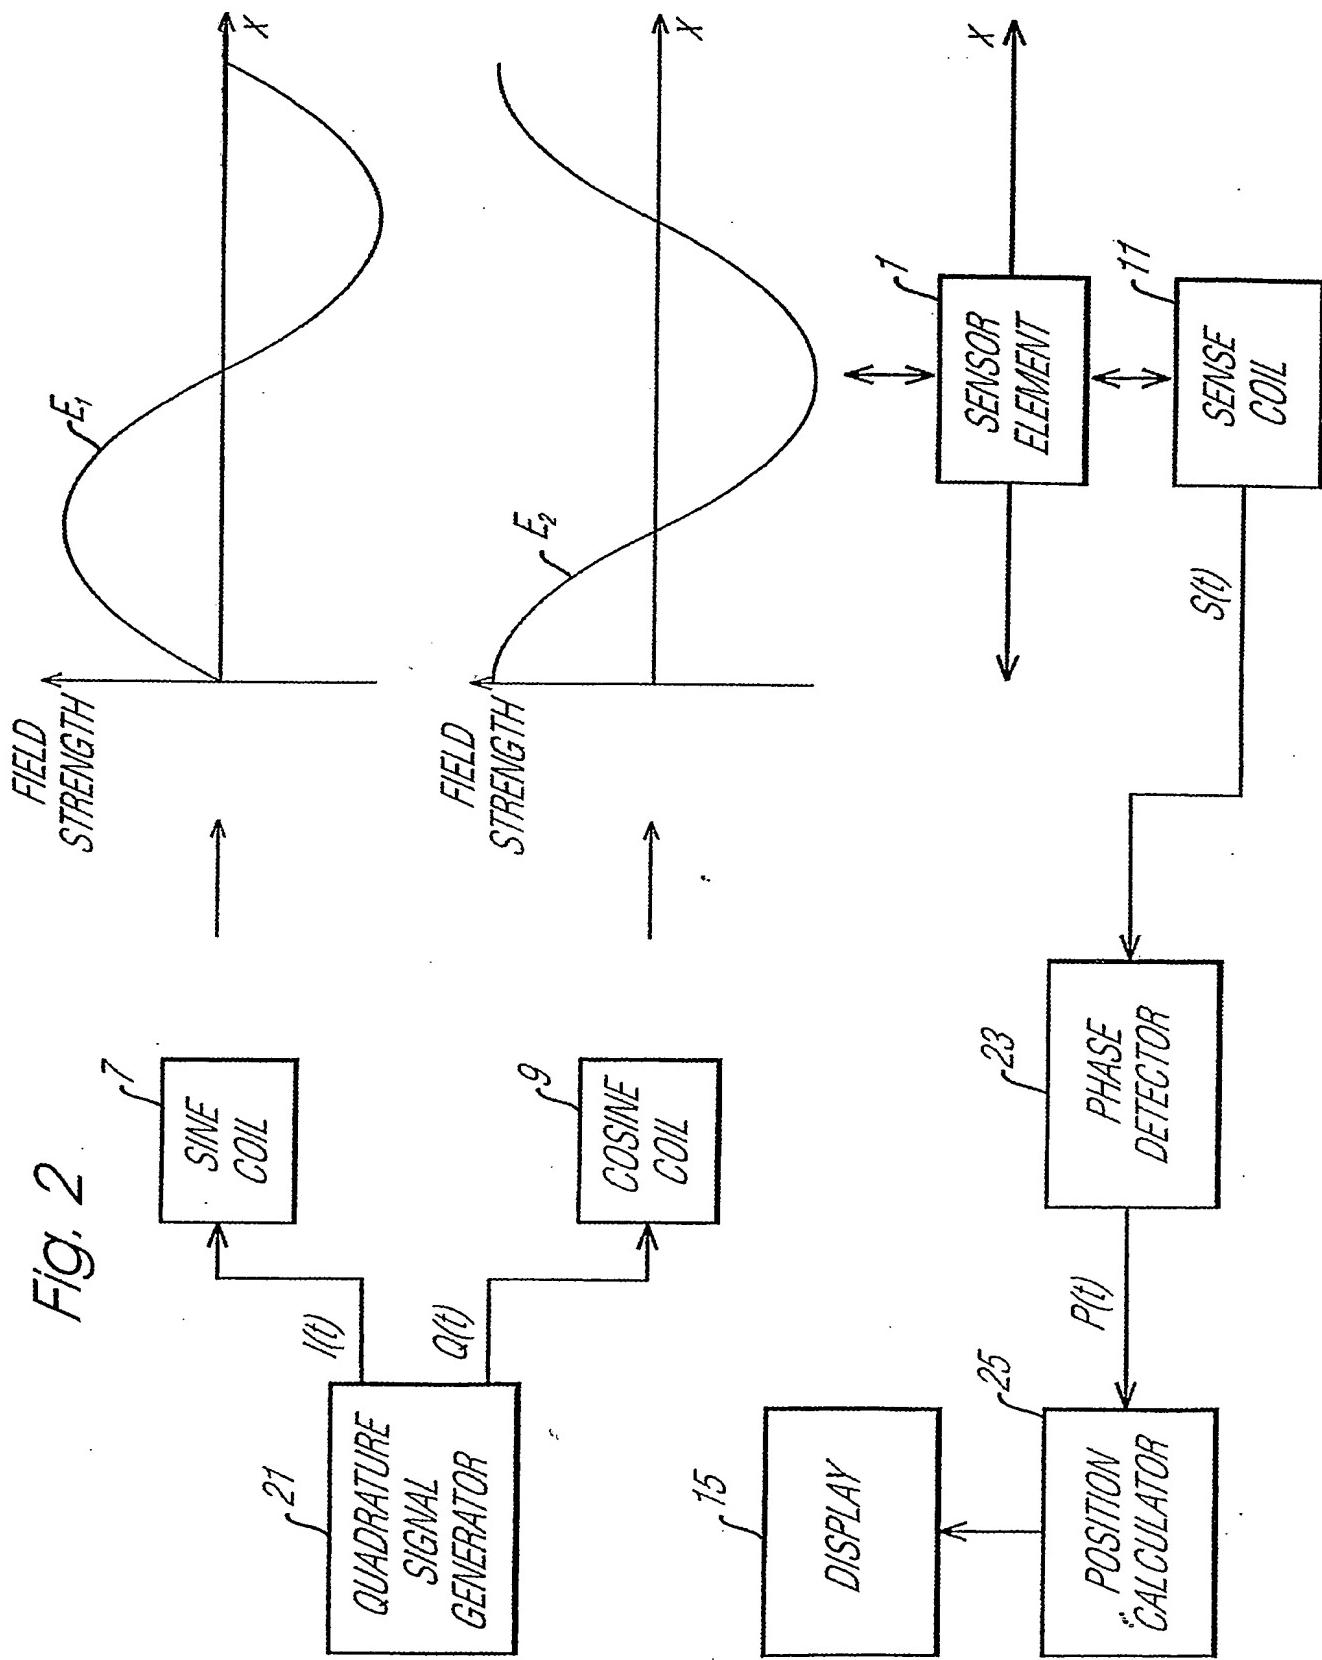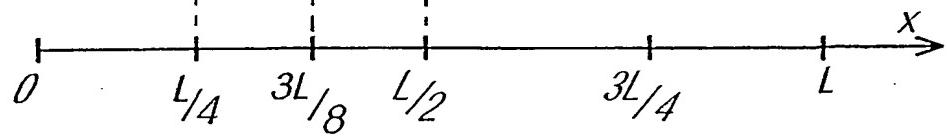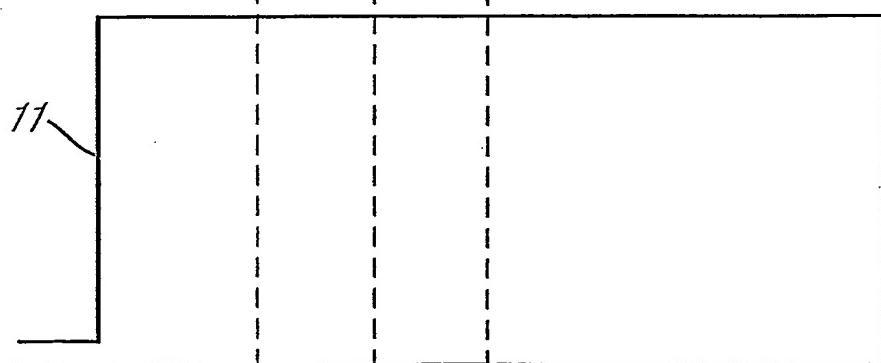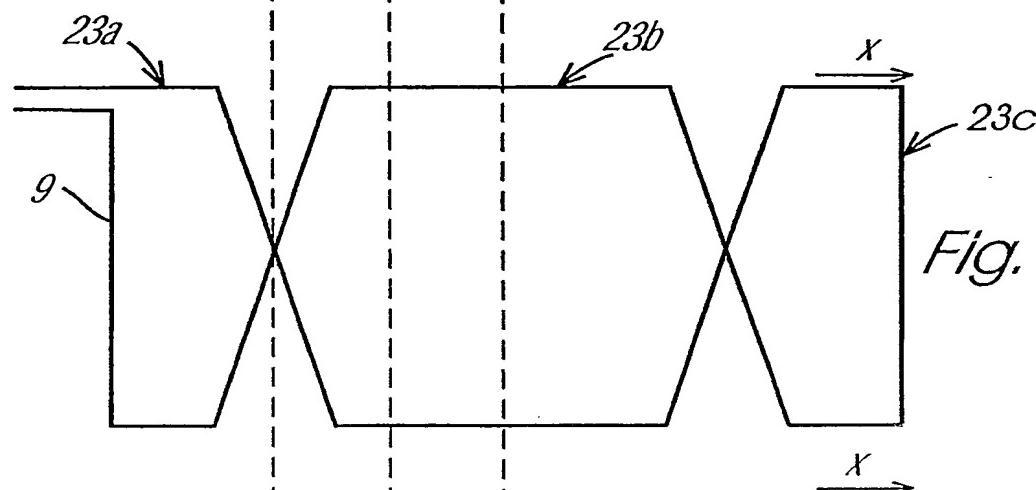

3/12

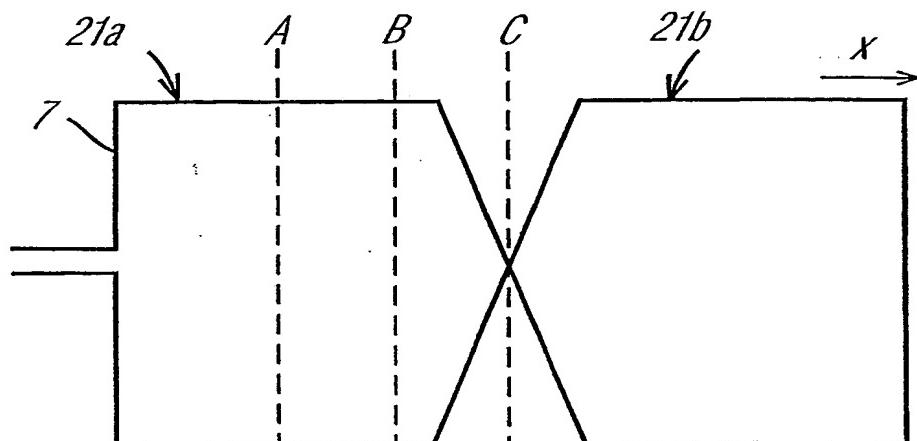

4/12

Fig. 4




Fig. 5A

Phase Delay of Driven Signal

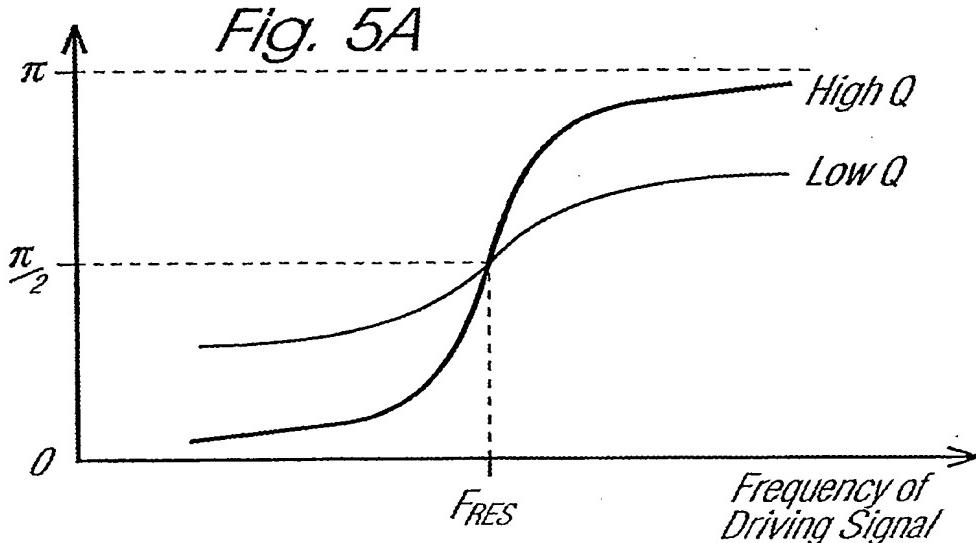


Fig. 5B

Amplitude of Resonator Response


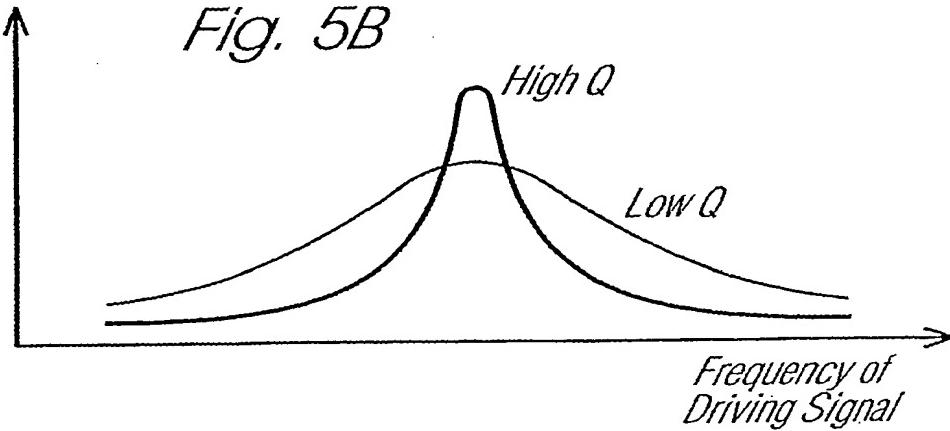


Fig. 5C

Amplitude

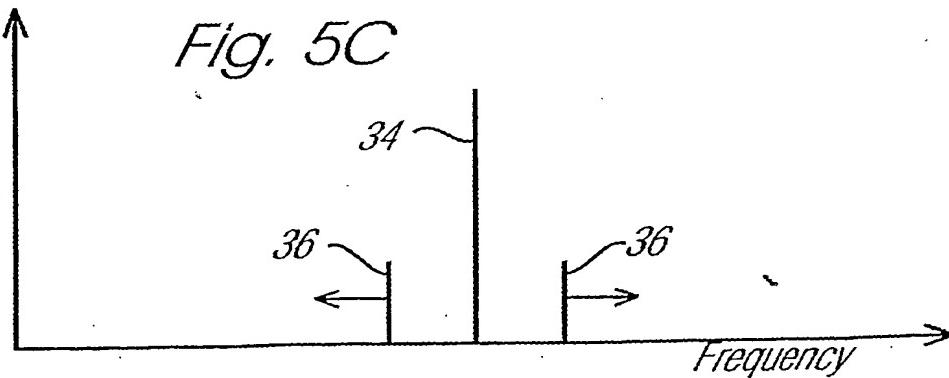


10/531591

WO 2004/036148

PCT/GB2003/004457

5/12

Fig. 6

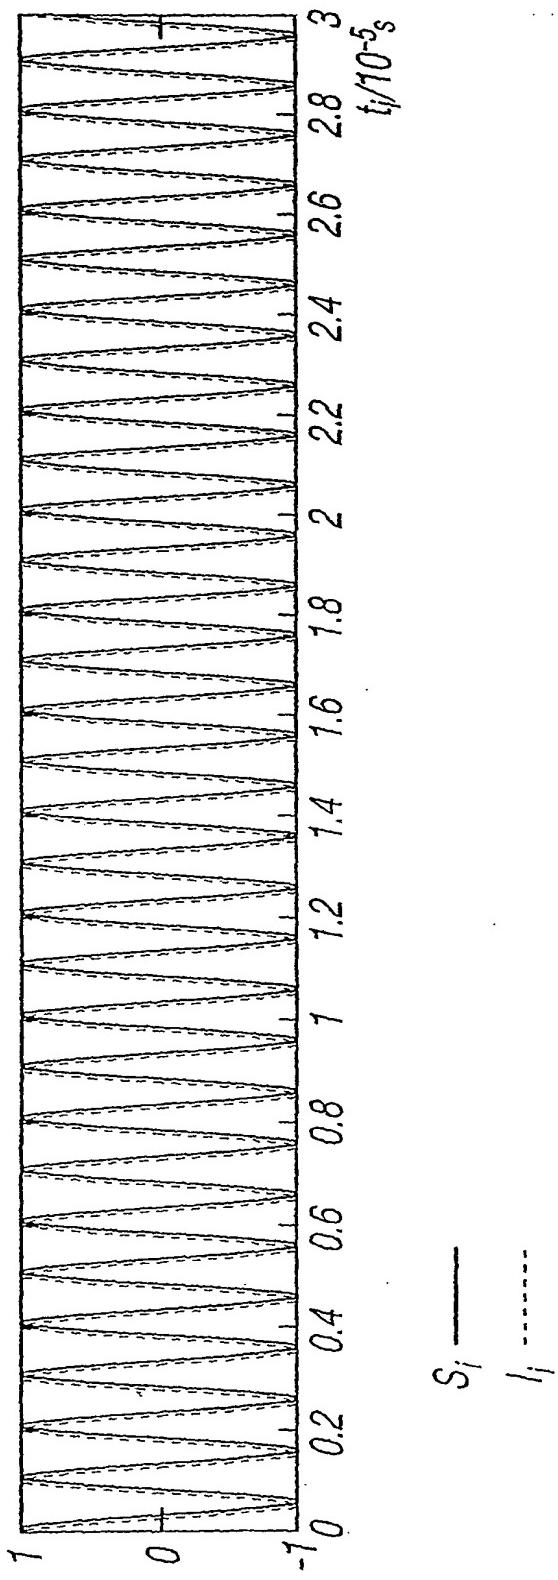

6/12

Fig. 7

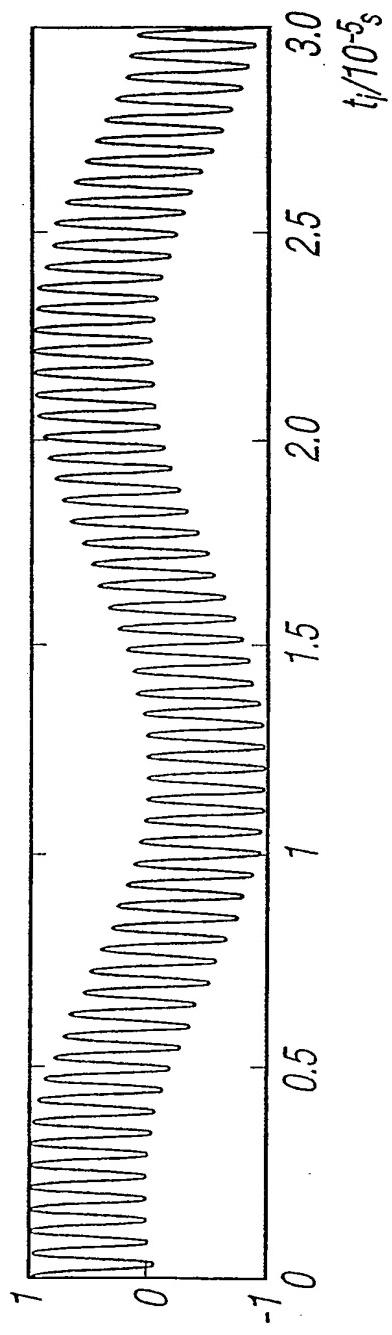


Fig. 8

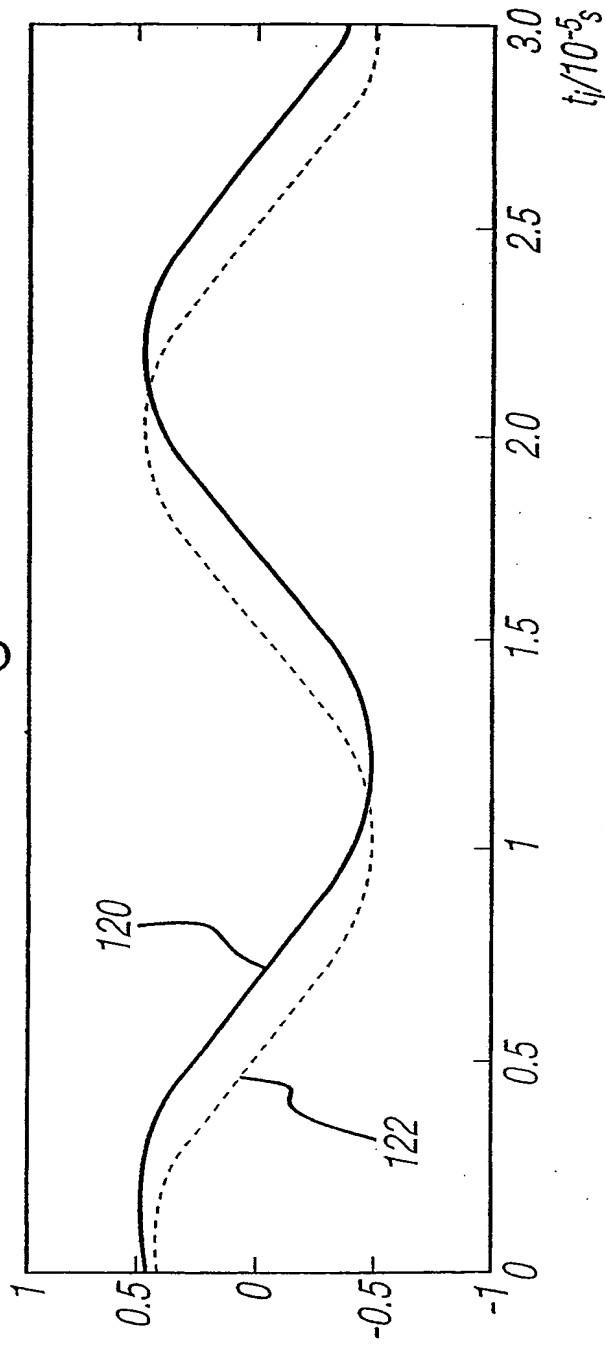


Fig. 9


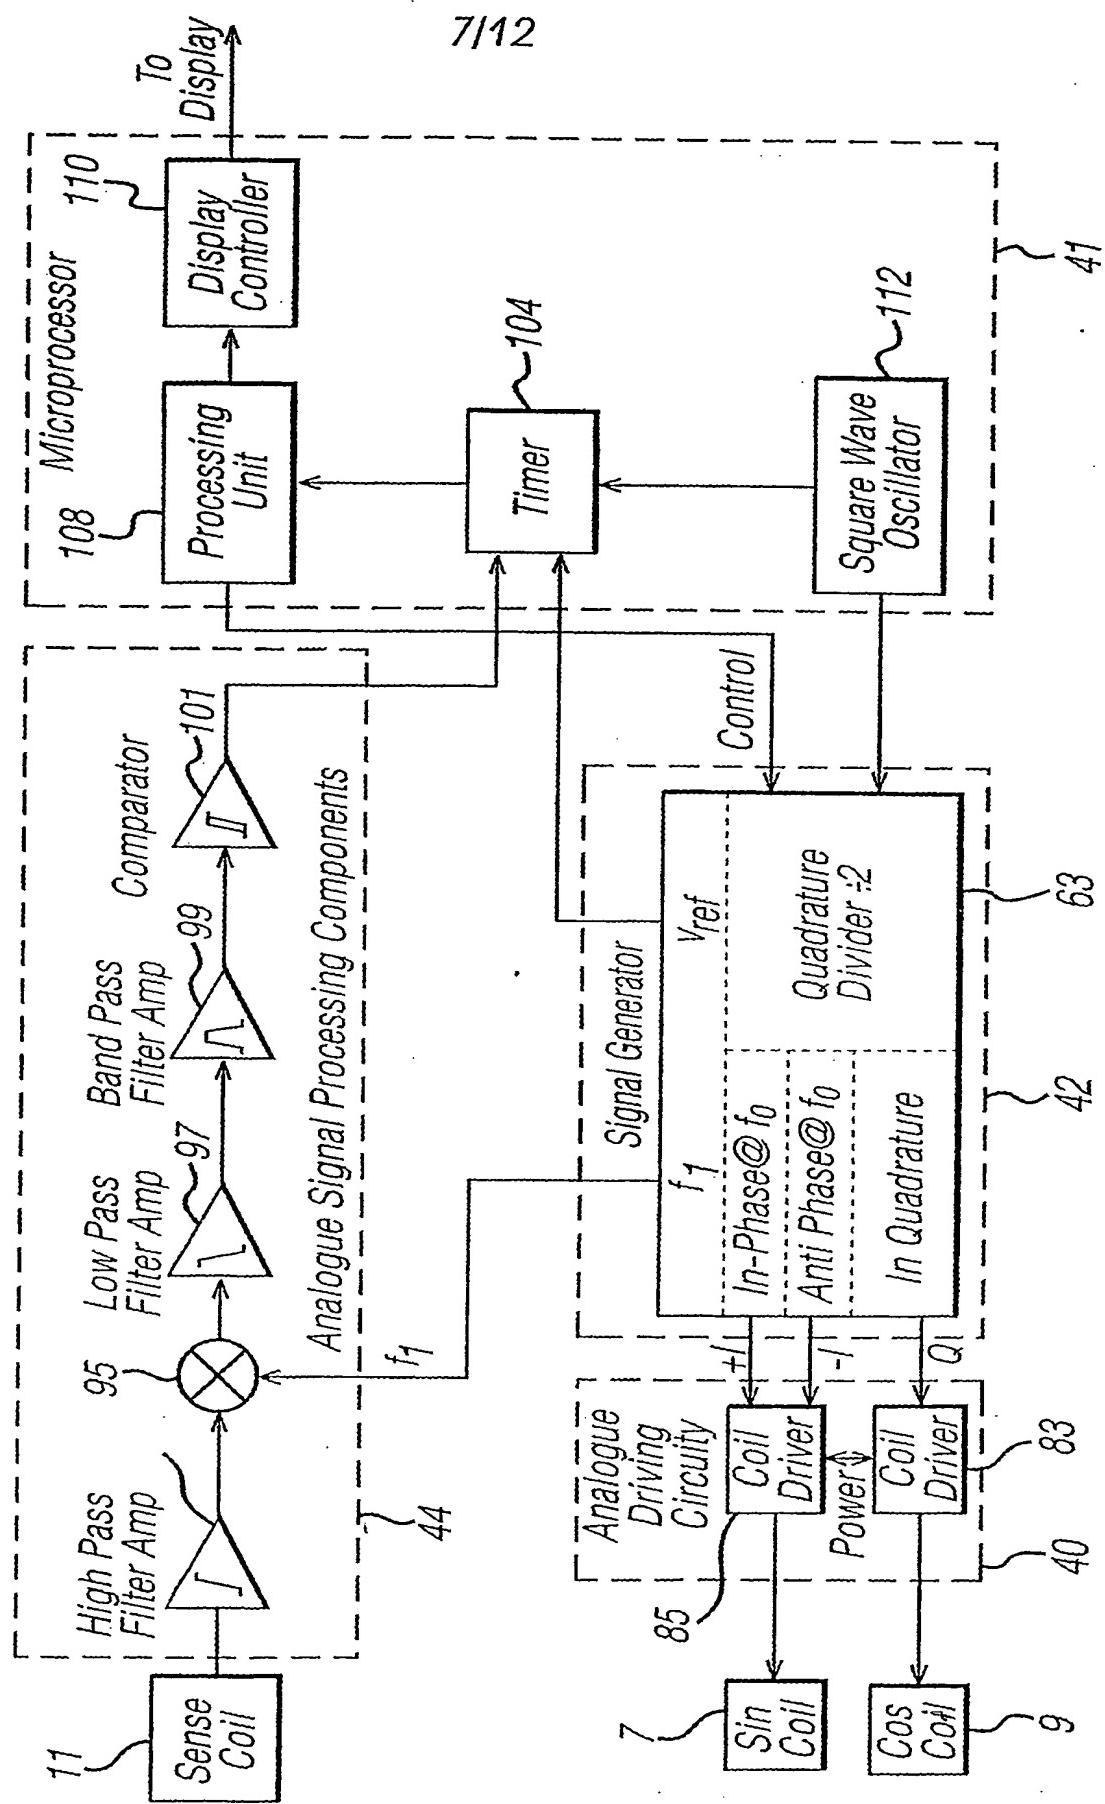


Fig. 10

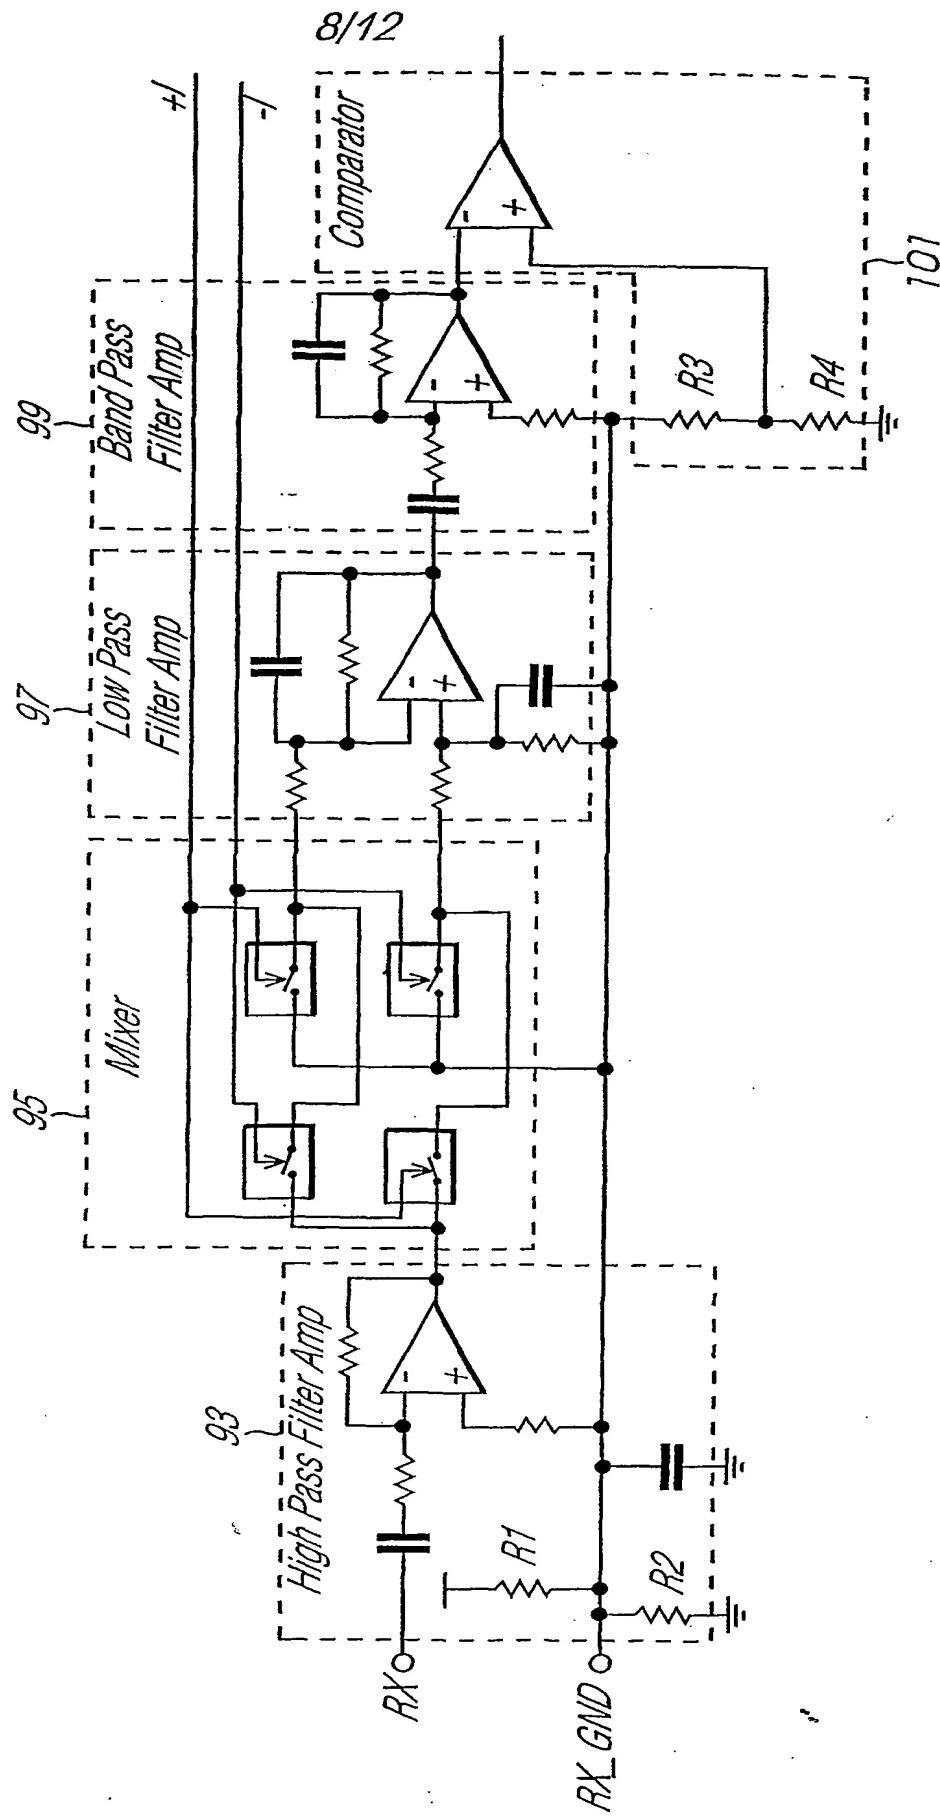

9/12

Fig. 11A

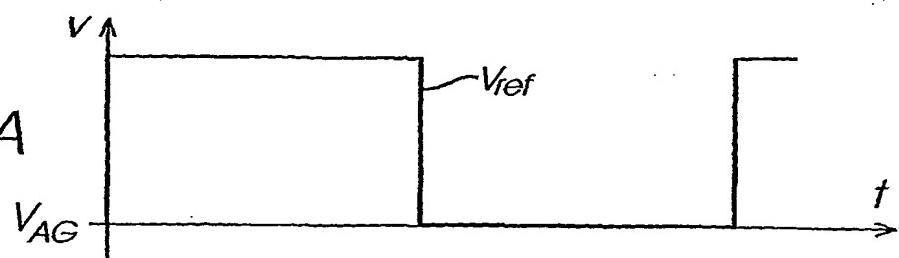


Fig. 11B

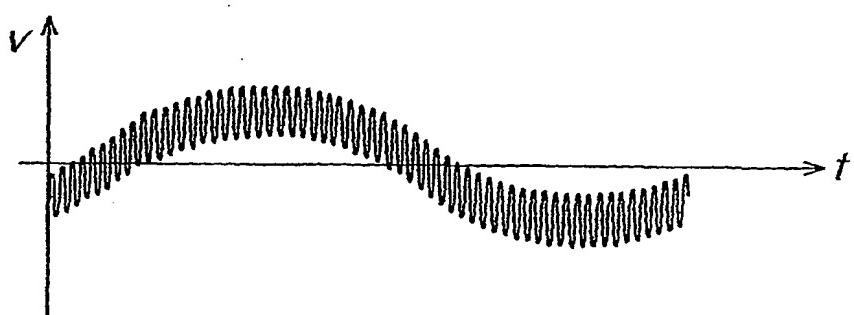


Fig. 11C



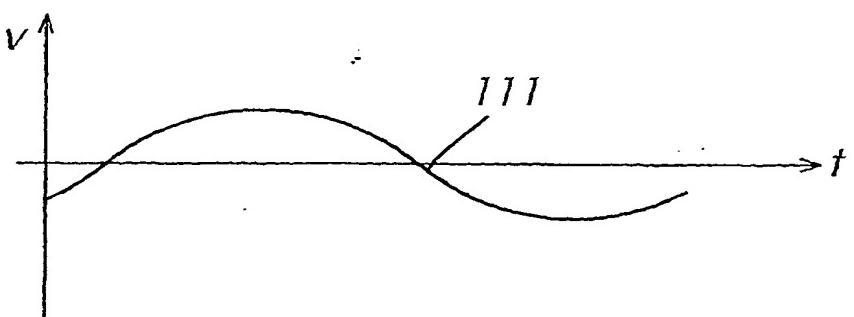


Fig. 11D

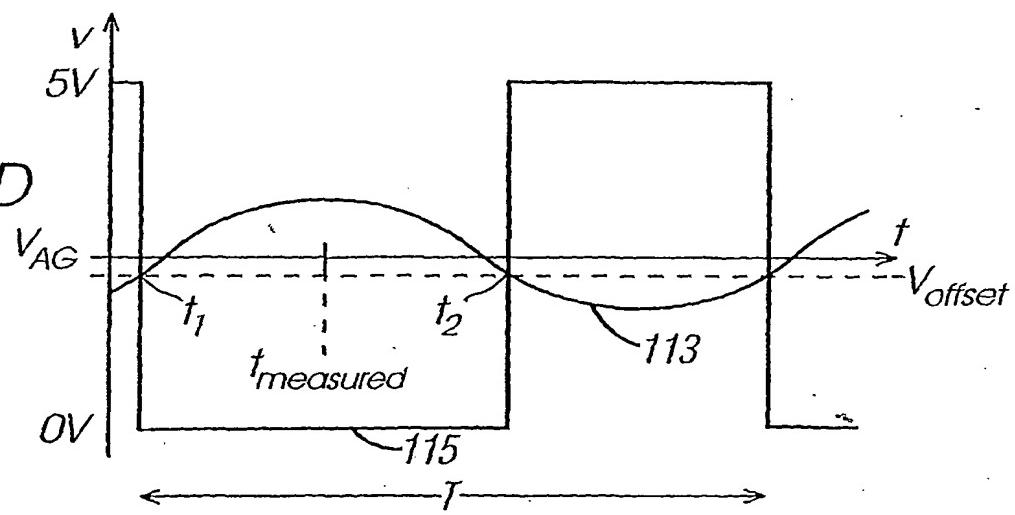


10/12

Fig. 12

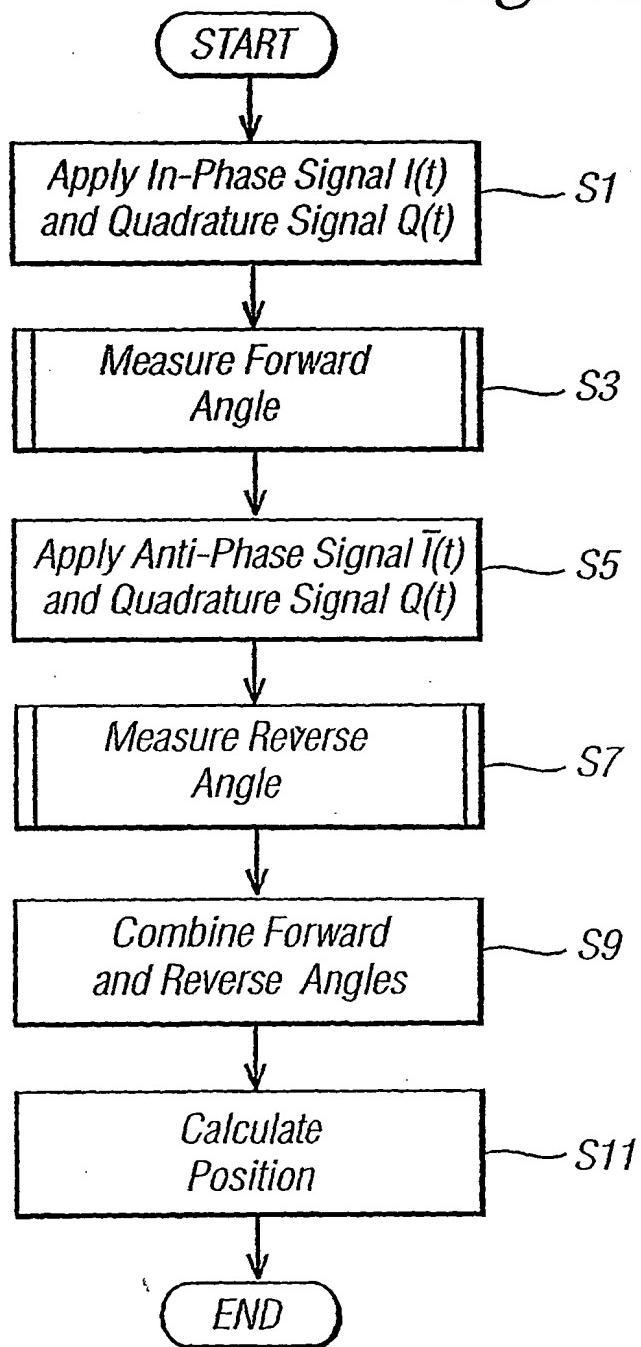

11/12

Fig. 13

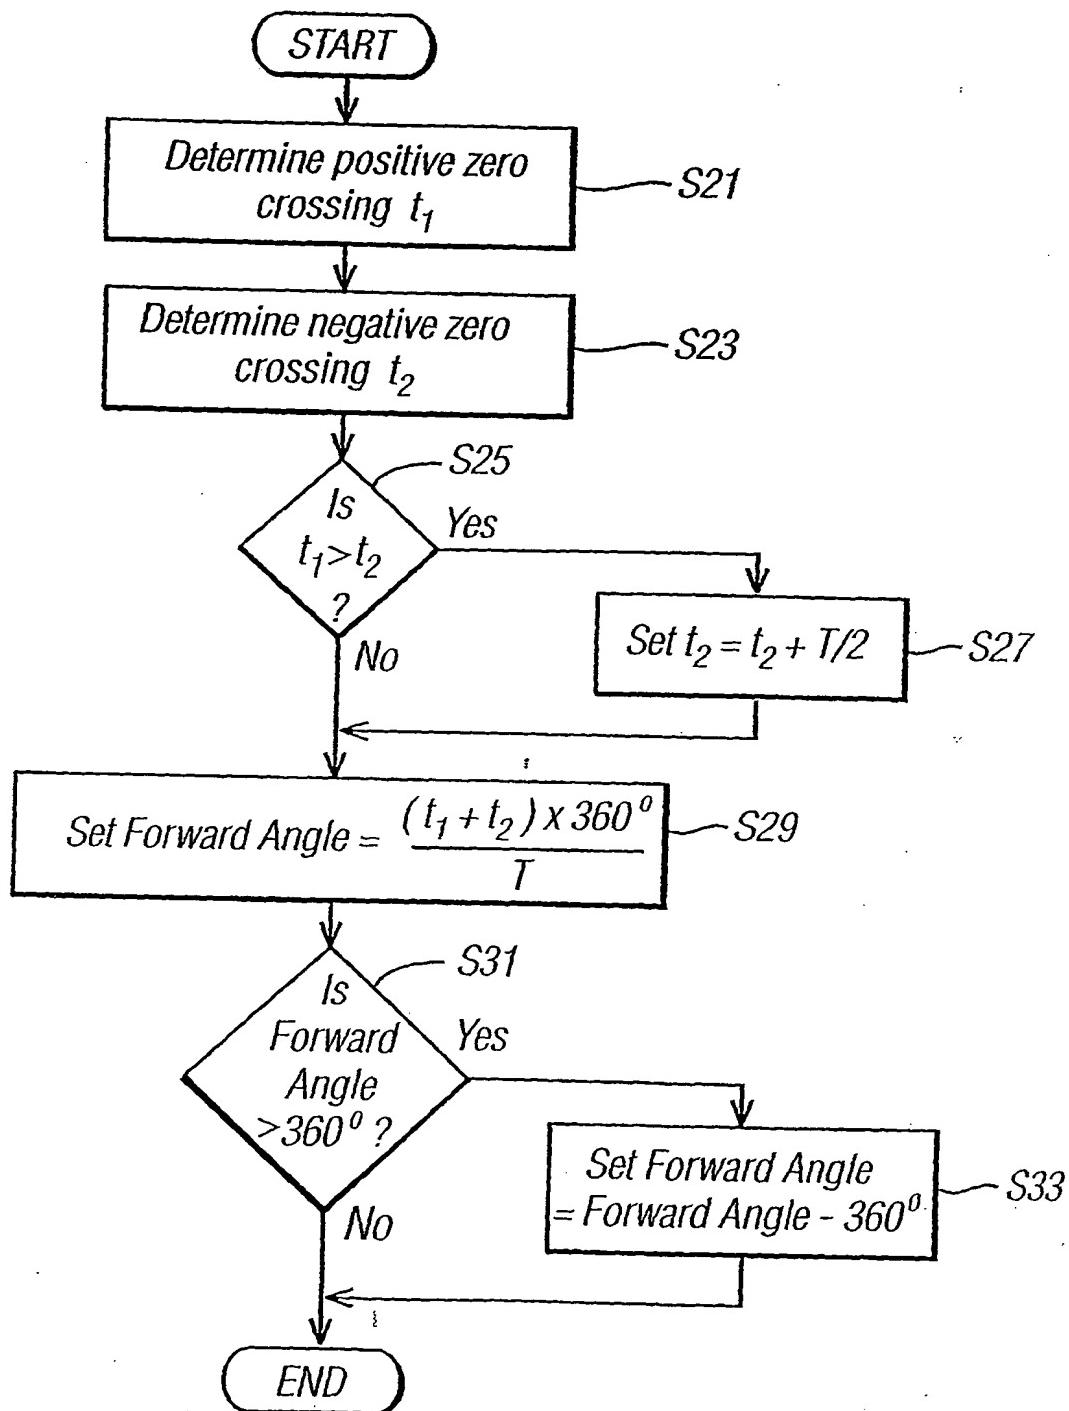

12/12

Fig. 14

